


STAR : ODDI

DST compass magnetic

Compass, Tilt (3D), Temperature and Depth Logger

For monitoring behavior, movements and orientation of subsea gear, lines and underwater vehicles. Adding the Star-Oddi's adjustable housing offers flexible mounting options.

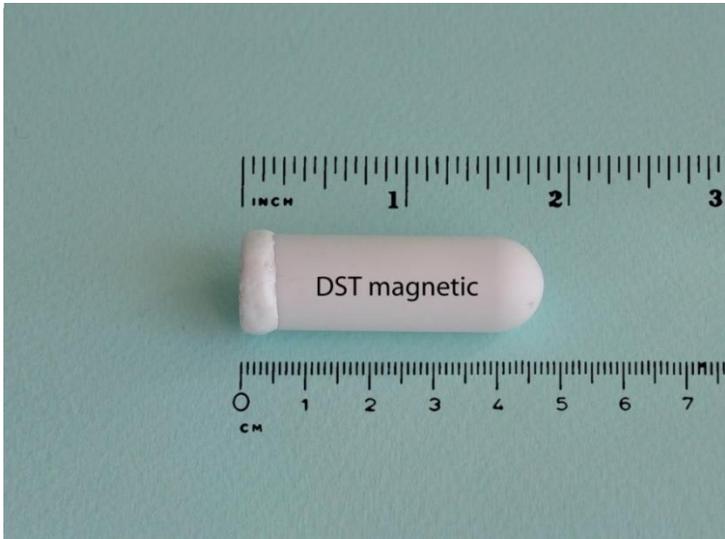

Key features

- Smallest compass logger on the market
- Protective housing holds the logger in a fixed position and gives flexible mounting
- Easy to mount on gear
- Wide selection of pressure/depth ranges, from shallow to deep ocean.

Required accessories

PC Communication Cable,
SeaStar Windows software
Option: POM plastic protective
housing, stainless steel
housing.

Various depth/pressure ranges

Choose a calibration range up
to: 50 m, 100 m, 270 m, 800 m,
1500 m or 3000 m

Contact Us

Email: sales@star-oddi.com

Phone: +354 533 6060

Star-Oddi Ltd
Skeidaras 12
210 Gardabaer
Iceland

TECHNICAL SPECIFICATIONS

Sensors	Magn. field strength (3D), tilt (3D), temp, depth*
Size (Diameter x Length)	15mm x 46mm
Housing Material	Alumina (Ceramic)
Weight (in Air/in Water)	19g/12g
Data Resolution	12 bits for temp/depth, 12 bits for magnetic field strength (compass) and tilt
Compass Resolution	1°
Compass Accuracy	+/-15° heading with tilt correction on compass, up to +/-45° from horizontal plane
Magnetic Field Strength Range	0 to 2 gauss
Magnetic Field Strength Resolution	100nT
Magnetic Field Strength Accuracy	+/-300nT
Tilt Range	+/-90° (180° span)
Tilt Resolution	0.05°
Tilt Accuracy	+/-3°
Temperature Range	-1°C to +40°C (30°F to 104°F)
Temperature Resolution	0.032°C (0.058°F)
Temperature Accuracy	+/-0.1°C (0.18°F)
Temperature Response Time	Time constant (63%) reached in 20 sec.
Standard Depth Ranges	0.1m-50m, 0.1m-100m, 1m-270m, 5m-800m, 5m-1500m, 10m-3000m
Depth Resolution	0.03% of selected range
Depth Accuracy	+/-0.6% of selected range

Depth Response Time	Immediate
Memory Type	Non-volatile EEPROM
Memory Capacity	104,634 measurements**
Memory Capacity Bytes	392,379 bytes / temperature-pressure 3 bytes, compass (MFS)-tilt 12 bytes
Sampling Interval	User specified in second(s) minute(s), or hour(s)
Minimum Measuring Interval	1 second
Multiple Intervals Option	Up to 7 different intervals
Primary/Secondary Option	Temp/depth as primary, CompTilt as primary
Data Retention	25 years
Clock	Real time clock. Accuracy +/-1 min/month.
Communications	Communication Box, wireless transmission when DST sits in the box. Connection to PC: USB cable.
Attachment Hole	0.9 mm (diameter)
Battery Life	3 years***

*Pressure & temperature sensors optional.

**Divided between the number of sensors

*** For sampling interval of 10 minutes; MFS-tilt, and temp-pressure recorded simultaneously.

Warranty: 12 months.

Specifications may change without notice.